




专业泳池泵 PROFESSIONAL SWIMMING POOL PUMP



ATS

AT

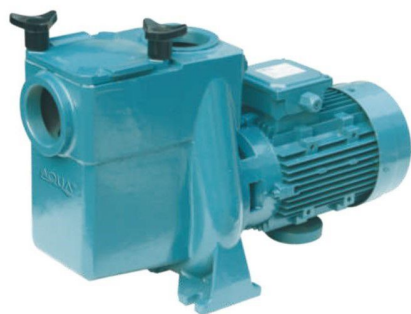

Operating conditions

Liquid temperature up to 60°C.
Ambient temperature up to 40°C.
Maximum self-priming lift up to 2 m.
Maximum working pressure up to 6 bar.

使用环境:

最大液体温度: 60°C
最大环境温度: 40°C
最大自吸扬程: 2米
最大允许工作压力: 6 bar

Motor

2-phase induction motor, 50 Hz,
2900 rpm.
400V $\pm 10\%$ from 2.2 to 11kW.
Insulation class F.
Protection IP54.
Constructed in accordance with IEC 34.

电机:

2相感应电动机, 50赫兹, 每分钟
2900转;
功率: 400V $\pm 10\%$ 从2.2到
11kW;
绝缘等级: F
保护等级: IP54
符合IEC34标准的要求。






耐高温带牙法兰(选购)
High temperature resistant
tooth flange (optional)



叶轮 AISI304不锈钢材质
Impeller AISI304 stainless steel

Specification and size:

技术参数及产品尺寸

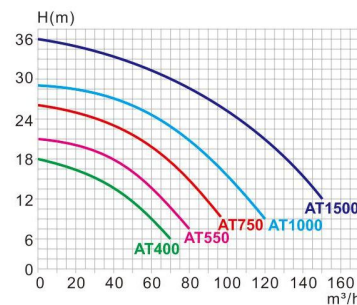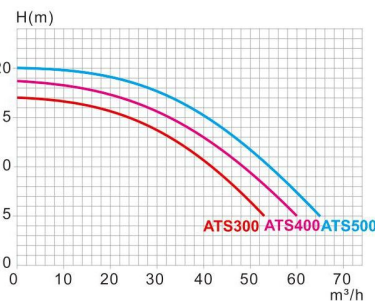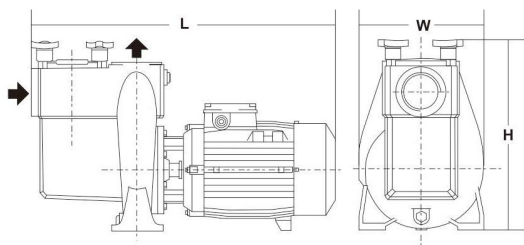

Model 型号	Voltage 额定电压 (V)	Connection Size 接口尺寸	Power 输出功率 (kW)	Weight 重量 (kg)	Length 长 (mm)	Width 宽 (mm)	Height 高 (mm)
ATS300	380	DN65	2.2	46.0	597	262	360
ATS400	380	DN65	3.0	48.0	597	262	360
ATS500	380	DN65	3.8	49.0	597	262	360
AT400	380	DN80	3.0	93.0	715	332	472
AT550	380	DN80	4.0	95.0	715	332	472
AT750	380	DN80	5.5	100.0	750	332	472
AT1000	380	DN80	7.5	110.0	860	332	472
AT1500	380	DN80	11.0	115.0	860	332	472